



Om Infra

Mfg. of RCC Compound wall

Block - 362/B, Opp. Metro Hotel, N.H.-8, Alipor,
Ta. Chikhli, Di. Navsari-396 409. (Gujarat)
Mob. : +91-98255 33122 / +91-97266 62913
E-mail : ominfra051@gmail.com



॥ जय श्री कृष्ण ॥

- R.C.C. Folding Compound Wall
- Labour Quarters
- Office Building
- Garden Curbing
- Godown



Company Profile



Product's Specification




About Products



Product's Specification



Vertical concrete posts as well as well as horizontal planks is caste using prestress. Technology with designed concrete mix to achieve maximum durability and strength.

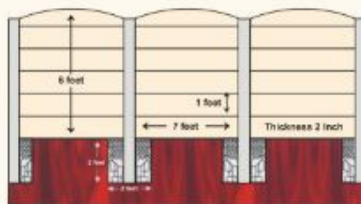

Available in 4 feet to 10 feet Height

Cement Plank :

Length 7 Feet (2100 mm)
Height 1 Feet (300 mm)
Width 2 Inches (50 mm)
We use PCC steel with 3 mm and 3 Pieces per plank, with stressing system.



Columns :

Columns is 6 x 6 inches. (150 x 150mm)
We use PCC steel with 3 mm and 7 pieces per columns.
With stressing system.
Length is depend on customer's requirement.

General Characteristics :

- Less Space is required
- Very fast erection
- Durability
- Re-installable
- Better Outlook
- Fully RCC with steel
- Varied designs



Product Application :

- Compound wall
- Godown / industrial shed
- Office Building
- Security Cabin
- Labour Quarter
- Garden Curbing

Our Mission :

To set standards for excellence and safety in the infrastructure industry by profitably producing and supplying aggregate based products and services, achieving market dominance by building a market driven and customer responsive culture and continuously growing as people and a company.

About us :

We Om Infra are a leading manufacturing company engaged in the manufacture of RCC precast folding compound wall. Keeping pace with the technological advancement of raw material suppliers, extensive research and development and providing innovative solutions to difficult installation changes. Quality is our best assurance of customer allegiance.